



Speech Performance Test Plan

Version 2.5.2

October 2024

© 2018 - 2024 CTIA Certification. All Rights Reserved.

Any reproduction, modification, alteration, creation of a derivative work, or transmission of all or any part of this publication ("Test Plan"), in any form, by any means, whether electronic or mechanical, including photocopying, recording, or via any information storage and retrieval system, without the prior written permission of CTIA Certification, is unauthorized and strictly prohibited by federal copyright law. This Test Plan is solely for use within the CTIA Certification Program. Any other use of this Test Plan is strictly prohibited unless authorized by CTIA Certification or its assigns in writing.

CTIA Certification LLC
1400 16th Street, NW
Suite 600
Washington, DC 20036

1.202.785.0081

programs@ctiacertification.org

Table of Contents

Section 1	Introduction	6
1.1	Purpose	6
1.2	Scope	6
1.3	Reference Documents	6
1.4	Acronyms and Definitions	7
Section 2	Test Requirements	9
2.1	Narrowband Test Cases	9
2.1.1	Test Cases for 3GPP and 3GPP2 Methods	9
2.1.2	LTE Narrowband Radio Networks and Codecs (Normative)	15
2.1.3	CDMA Narrowband Radio Networks and Codecs (Informative)	15
2.1.4	UMTS Narrowband Radio Networks and Codecs (Informative)	15
2.1.5	GSM Narrowband Radio Networks and Codecs (Informative)	15
2.1.6	WLAN Narrowband Radio Networks and Codecs (Informative)	15
2.1.7	5G FR1 SA Narrowband Radio Networks and Codecs (Informative)	15
2.1.8	5G FR1 NSA Narrowband Radio Networks and Codecs (Informative)	15
2.2	Wideband Test Cases	16
2.2.1	Test Cases for 3GPP and 3GPP2 Methods	16
2.2.2	LTE Wideband Radio Networks and Codecs (Normative)	21
2.2.3	CDMA Wideband Radio Networks and Codecs (Informative)	21
2.2.4	UMTS Wideband Radio Networks and Codecs (Informative)	21
2.2.5	WLAN Wideband Radio Networks and Codecs (Informative)	21
2.2.6	5G FR1 SA Wideband Radio Networks and Codecs (Informative)	21
2.2.7	5G FR1 NSA Wideband Radio Networks and Codecs (Informative)	21
2.3	Super-wideband Test Cases	22
2.3.1	Test Cases for 3GPP Methods	22
2.3.2	LTE Super Wideband Radio Networks and Codecs (Normative)	25
2.3.3	WLAN Super Wideband Radio Networks and Codecs (Informative)	25
2.3.4	5G FR1 SA Super Wideband Radio Networks and Codecs (Informative)	25
2.3.5	5G FR1 NSA Super Wideband Radio Networks and Codecs (Informative)	25
2.4	Device Positioning	26
2.4.1	Handset Mode (Normative)	26
2.4.2	Handheld Handsfree/Speakerphone Mode (Normative)	27
2.4.3	Headset Mode (Informative)	27
2.4.4	Wrist-worn Wearables Mode (Informative)	27
2.5	Test Methods for Quality in the Presence of Ambient Noise	28
2.5.1	Speech Material	28

2.5.2	Background Noise Simulation and Spectral Validation	28
2.5.3	Measurement Procedure	28
Appendix A	Verification Method for ETSI ES 202 396-1 Background Noise Simulation	29
A.1	Objective	29
A.2	Method	29
A.3	References	30
Appendix B	Radio Network and Codec Information.....	31
Appendix C	Revision History	32

List of Figures

Figure 2.4-1	Figure Device Under Test (in Red) Mounted on Arm Positioned in Front of HATS	28
--------------	--	----

List of Tables

Table 1.4-1	Acronyms and Definitions	7
Table 2.1-1	Narrowband Handset Mode Test Cases and Applicable Settings.....	9
Table 2.1-2	Narrowband Handheld Hands-Free/Speakerphone Mode Test Cases and Applicable Settings.....	11
Table 2.1-3	Narrowband Headset Mode Test Cases and Applicable Settings.....	12
Table 2.1-4	Narrowband Headset Interface Mode Test Cases and Applicable Settings	13
Table 2.1-5	Narrowband Additional Test Cases for 3GPP Methods in Handset and Headset Modes.....	14
Table 2.1-6	Narrowband Wrist-Worn Wearables Mode Test Cases and Applicable Settings	14
Table 2.2-1	Wideband Handset Mode Test Cases and Applicable Settings.....	16
Table 2.2-2	Wideband Handheld Handsfree / Speakerphone Mode Test Cases and Applicable Settings.....	17
Table 2.2-3	Wideband Headset Mode Test Cases and Applicable Settings	18
Table 2.2-4	Wideband Headset Interface Mode Test Cases and Applicable Settings	19
Table 2.2-5	Wideband Additional Test Cases For 3GPP Methods In Handset And Headset Modes	20
Table 2.2-6	Wideband Wrist-Worn Wearables Mode Test Cases and Applicable Settings	20
Table 2.3-1	Super-Wideband Handset Mode Test Cases and Applicable Settings.....	22
Table 2.3-2	Super-Wideband Handheld Hands-free/Speakerphone Mode Test Cases and Applicable Settings.....	23
Table 2.3-3	Super-Wideband Headset Mode Test Cases and Applicable Settings.....	24
Table 2.3-4	Super-Wideband Headset Interface Mode Test Cases and Applicable Settings	25

Table 2.4-1 Handset Standard Position Angles	26
Table 2.4-2 Table for Reporting MECRP Positioning Values	26
Table A.2-1 Filters for Reference Scores	29
Table A.2-2 Reference Scores for Wideband [From [A2]].....	29

Section 1 Introduction

1.1 Purpose

The purpose of this document is to define the test methods for measuring the performance of 3GPP and 3GPP2 speech capable wireless devices, in narrowband (NB), wideband (WB) modes, and super-wideband (SWB) modes.

1.2 Scope

This document defines a set of standard test measurements, with associated test setup and test signal conditions for narrowband, wideband, and super-wideband mode. Devices designed for 5G, LTE, GSM/UMTS and CDMA shall be tested per the respective standard contained herein.

1.3 Reference Documents

The following documents are referenced in this test plan:

- [1] 3GPP TS26.132 v16.2.0 (2020-03): 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Speech and video telephony terminal acoustic test specification (Release 16)
- [2] ETSI TS 103 106, v1.6.1 (2021-07): Speech and multimedia Transmission Quality (STQ): Speech quality performance in the presence of background noise: Background noise transmission for mobile terminals – objective test methods.
- [3] ETSI ES 202 396-1, v1.7.1 (2017-08): Speech and multimedia Transmission Quality (STQ): Speech quality performance in the presence of background noise: Part 1: Background noise simulation technique and background noise database
- [4] 3GPP2 C.S0056-A v.1.0 (2013-03): Electro-Acoustic Recommended Minimum Performance Specification for cdma2000 mobile stations
- [5] ITU-T Recommendation P.57 Ed. 6 (2011-12): Artificial Ears
- [6] ITU-T Recommendation P.58 Ed. 4 (2013-05): Head and torso simulator for telephonometry
- [7] ITU-T Recommendation P.64 Ed. 8 (2007-11): Determination of sensitivity/frequency characteristics of local telephone systems
- [8] ITU-T Recommendation P.380 Ed. 1 (2003-11): Electro-acoustic measurements on headsets
- [9] ITU-T Recommendation P.581 Ed. 3 (2014-02): Use of head and torso simulator (HATS) for hands- free and handset terminal testing
- [10] ETSI EG 202 518 V1.4.1 (2014-01): Speech and multimedia Transmission Quality (STQ); Acoustic Output of Terminal Equipment; Maximum Levels and Test Methodology for Various Applications
- [11] 3GPP TS 26.131 v16.0.0 (2019-09): 3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Terminal acoustic characteristics for telephony; Requirements (Release 16)

- [12] ETSI TS 103 224 V1.6.1 (2022-03): Speech and multimedia Transmission Quality (STQ); A sound field reproduction method for terminal testing including a background noise database.
- [13] ITU-T P.381 Ed. 4 (2017-03): Technical requirements and test methods for the universal wired headset or headphone interface of digital mobile terminals
- [14] ITU-T Recommendation P.863 (03/2018): Perceptual objective listening quality Prediction
- [15] ITU-T Recommendation P.863.1 (04/2020): Amendment 1: Revised Appendix III – Prediction of acoustically recorded narrowband speech
- [16] ETSI TS 103 334 V1.1.1 (2018-01): Speech and multimedia Transmission Quality (STQ); Transmission requirements for wearable wireless terminals from a QoS perspective as perceived by the user
- [17] ETSI TS 103 281, v1.3.1 (2019-05): Speech and multimedia Transmission Quality (STQ); Speech quality in the presence of background noise: Objective test methods for super-wideband and fullband terminals

1.4 Acronyms and Definitions

Table 1.4-1 Acronyms and Definitions

Acronyms	Definition
DRP	Drum Reference Point
ERP	Ear Reference Point
HATS	Head and Torso Simulator
HFRP	Hands Free Reference Position
Informative	Optional testing/condition that is not part of certification testing
MECRP	Manufacturer Ear Cap Reference Position
MRP	Mouth Reference Point
NB	Narrowband
Normative	Mandatory aspect for certification testing
SFR	Send Frequency Response
SLR	Sending Loudness Rating
SND	Sending or Transmit direction
SWB	Super-wideband
RCV	Receive direction
RFR	Receive Frequency Response

Acronyms	Definition
RLR	Receiving Loudness Rating
WB	Wideband

Section 2 Test Requirements

2.1 Narrowband Test Cases

2.1.1 Test Cases for 3GPP and 3GPP2 Methods

Harmonization of 3GPP and 3GPP2 standards permits a common set of test methods, as listed in the tables below.

2.1.1.1 Handset Mode (Normative)

Table 2.1-1 Narrowband Handset Mode Test Cases and Applicable Settings

Handset Narrowband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sect.
NB-001	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	nominal	8	3GPP TS 26.132	16.2.0	7.2.2.2
NB-002 NB-018	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	maximum	8 13	3GPP2 C.S0056- A	1.0	2.1.2.2
						3GPP TS 26.132	16.2.0	7.2.2.2
NB-019	RLR (dB) - Receive Loudness Rating in the presence of background noise	P.501 real speech ETSI TS 103 224 or ES 202 396-1 Pub Noise	-16 dBm0	nominal	8	3GPP TS 26.132	16.2.0	7.2.2.3
NB-003	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBP _a	nominal	8	3GPP TS 26.132	16.2.0	7.2.2.1
						3GPP2 C.S0056- A	1.0	2.2.2.2
NB-004	Idle Channel Noise SND	n/a ¹	n/a	nominal	8	3GPP TS 26.132	16.2.0	7.3.1
						3GPP2 C.S0056- A	1.0	2.2.4.2
NB-005	Idle Channel Noise RCV	n/a ¹	n/a	maximum	8	3GPP TS 26.132	16.2.0	7.3.2
						3GPP2 C.S0056- A	1.0	2.1.3.2
NB-006	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	8	3GPP TS 26.132	16.2.0	7.4.2
						3GPP2 C.S0056- A	1.0	2.1.1.2
NB-007	SFR - Send frequency response	P.501 real speech	-4.7 dBP _a	nominal	8	3GPP TS 26.132	16.2.0	7.4.1
						3GPP2 C.S0056- A	1.0	2.2.1.2
NB-008 ¹	TCL _w (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	2	3GPP TS 26.132	16.2.0	7.7.3
						3GPP2 C.S0056- A	1.0	2.2.3.2
NB-020	Echo control characteristics	P.501 double-talk speech	-4.7 dBP _a	nominal	8	3GPP TS 26.132	16.2.0	7.11
NB-009*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	real speech	-1.7 dBP _a	nominal	8	3GPP TS 26.132	16.2.0	7.12
		ETSI TS 103 106				3GPP2 C.S0056- A	1.0	2.7.2
NB-010	Round-trip Delay (ms)	single word	-4.7 dBP _a	nominal	8	3GPP TS 26.132	16.2.0	7.10
NB-011						3GPP2 C.S0056- A	1.0	2.6.2

Handset Narrowband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sect.
NB-012	Max acoustic pressure	Square Wave	-15 dBFS ²	maximum	13	ETSI EG 202 518	1.4.1	6.2.2.3
NB-013	STMR (Sidetone Masking Rating)	P.501 real speech	-4.7 dBPa	nominal, F=8		3GPP TS 26.132	16.2.0	7.5.1.2
NB-014				maximum, F=13		3GPP2 C.S0056- A	1.0	2.5.1.2
NB-015	Sidetone delay	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	7.5.4
						3GPP2 C.S0056- A	1.0	2.5.2.2
NB-074**	Delay and speech quality with packet jitter and loss ³	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	7.10.4
NB-076**	Speech Quality (reference condition)	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132 ITU-T P.863	16.2.0	7.10.4
<p>Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.</p> <p>Note 2: Increase the input signal level in 3 dB steps until it reaches 0 dBFS. Then, adjust the input signal level in 1 dB steps up and down around the input signal level that yields the highest output until the absolute maximum acoustic output is found. Refer to Section 6.2.2.2.2 of reference [10] for details.</p> <p>Note 3: Test case for Voice over LTE only.</p> <p>* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].</p> <p>** This test cases should be covered with delay profiles as specified in in 3GPP TS 26.132 [1].</p> <p>** All tests requiring recommendation P.863, should use a full band mode source signal as described in [14] and [15].</p>								

2.1.1.2 Handheld Hands-free/Speakerphone Mode (Normative)

Table 2.1-2 Narrowband Handheld Hands-Free/Speakerphone Mode Test Cases and Applicable Settings

HH Hands-free Narrowband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Distance	Document	Rev.	Sect.
NB-040	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	maximum	HFRP ¹	3GPP TS26.132	16.2.0	7.2.4.2
						3GPP2 C.S0056-A	1.0	Note ²
NB-041	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBPa	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	7.2.4.1
						3GPP2 C.S0056-A	1.0	Note ²
NB-042	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	HFRP ¹	3GPP TS26.132	16.2.0	7.4.6
						3GPP2 C.S0056-A	1.0	Note ²
NB-043	SFR - Send frequency response	P.501 real speech	-4.7 dBPa	nominal	HFRP ¹	3GPP TS26.132	16.2.0	7.4.5
						3GPP2 C.S0056-A	1.0	Note ²
NB-044	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	HFRP ¹	3GPP TS26.132	16.2.0	7.7.2
						3GPP2 C.S0056-A	1.0	Note ²
NB-075*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	real speech from TS 103 106	+1.3 dBPa	maximum	HFRP ¹	3GPP TS26.132	16.2.0	7.12.2
<p>Note 1: See section 2.3.2 (Device positioning Handheld Hands-free / Speakerphone mode for HFRP acceptable value).</p> <p>Note 2: For 3GPP2 Test Cases; Handheld Hands-free mode is not in the scope of reference [4] and while testing should be carried out in a similar fashion and methodology as per reference [1] radio system setup shall be in compliance with reference [4].</p> <p>* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].</p>								

2.1.1.3 Headset Mode (Informative)

Table 2.1-3 Narrowband Headset Mode Test Cases and Applicable Settings

Headset Narrowband Test Cases		Measurement Setup			Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Document	Rev.	Sect.
NB-060 NB-061	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	nominal	3GPP TS 26.132	16.2.0	7.2.2.2
				maximum	3GPP2 C.S0056-A	1.0	Note ²
NB-062	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	7.2.2.1
					3GPP2 C.S0056-A	1.0	Note ²
NB-063	Idle Channel Noise SND	n/a ¹	n/a	nominal	3GPP TS 26.132	16.2.0	7.3.1
					3GPP2 C.S0056-A	1.0	Note ²
NB-064	Idle Channel Noise RCV	n/a ¹	n/a	maximum	3GPP TS 26.132	16.2.0	7.3.2
					3GPP2 C.S0056-A	1.0	Note ²
NB-065	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	3GPP TS 26.132	16.2.0	7.4.2
					3GPP2 C.S0056-A	1.0	Note ²
NB-066	SFR - Send frequency response	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	7.4.1
					3GPP2 C.S0056-A	1.0	Note ²
NB-067	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	3GPP TS 26.132	16.2.0	7.7.3
					3GPP2 C.S0056-A	1.0	Note ²
NB-068	Round-trip Delay (ms)	single word	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	7.10
					3GPP2 C.S0056-A	1.0	Note ²
NB-069 NB-070	STMR (Sidetone Masking Rating)	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	7.5.1.2
				maximum	3GPP2 C.S0056-A	1.0	Note ²
NB-071	Sidetone delay	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	7.5.4
					3GPP2 C.S0056-A	1.0	Note ²
Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.							
Note 2: For 3GPP2 Test Cases; Headset mode is not in the scope of reference [4] and while testing should be carried out in a similar fashion and methodology as per reference [1] radio system setup shall be in compliance with reference [4]							

2.1.1.4 Headset Interface Mode (Informative)

Table 2.1-4 Narrowband Headset Interface Mode Test Cases and Applicable Settings

Headset Interface Narrowband Test Cases		Measurement Setup			Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Document	Rev.	Sect.
NB-080 NB-081	Level in Receive for Nominal speech input level	P.501 real speech	-16 dBm0	nominal maximum	ITU-T P.381	4	7.1.4
NB-082	Level in Send for Nominal speech input Level	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.3
NB-083	Noise in Send	n/a ¹	n/a	nominal	ITU-T P.381	4	7.1.11
NB-084	Noise in Receive	n/a ¹	n/a	nominal	ITU-T P.381	4	7.1.12
NB-085	Receiving frequency response	P.501 real speech	-16 dBm0	nominal	ITU-T P.381	4	7.1.8
NB-086	Sending frequency response	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.7
NB-087	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	ITU-T P.381	4	7.1.18
NB-088	Delay (Send + Receive) (ms)	single word	-60 dBV	nominal	ITU-T P.381	4	7.1.2
NB-089 NB-090	Sidetone Loss STMR	P.501 real speech	-60 dBV	nominal maximum	ITU-T P.381	4	7.1.9
NB-091	Sidetone delay	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.10
Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.							

2.1.1.5 Additional Test Cases, Handset and Headset, for 3GPP Methods (Normative for Handset and Informative for Headset)

Two additional test cases for each of Handset and Headset are added for 3GPP methods only.

Table 2.1-5 Narrowband Additional Test Cases for 3GPP Methods in Handset and Headset Modes

Handset/Headset Narrowband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sept.
NB-016	Handset Distortion, SND	Sinusoidal	5, 0, -4.7, -10, -15, -20 dBPa	nominal	8	3GPP TS 26.132	16.2.0	7.8.1
NB-017	Handset Distortion, RCV	Sinusoidal + activation	0, -3, -10, -16, -20, -30, -40, -45dBm0	nominal	8	3GPP TS 26.132	16.2.0	7.8.2
NB-072	Headset Distortion, SND	Sinusoidal	5, 0, -4.7, -10, -15, -20 dBPa	nominal	n/a	3GPP TS 26.132	16.2.0	7.8.1
NB-073	Headset Distortion, RCV	Sinusoidal+ activation	0, -3, -10, -16, -20, -30, -40, -45dBm0	nominal	n/a	3GPP TS 26.132	16.2.0	7.8.2

2.1.1.6 Wrist-worn Wearables Mode for Wearable Device (Informative)

Table 2.1-6 Narrowband Wrist-Worn Wearables Mode Test Cases and Applicable Settings

Wearables Narrowband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Distance	Document	Rev.	Sept.
NB-077	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	7.2.4.2
						3GPP2 C.S0056-A	1	Note ²
NB-078	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBPa	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	7.2.4.1
						3GPP2 C.S0056-A	1	Note ²
NB-079	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	7.4.6
						3GPP2 C.S0056-A	1	Note ²
NB-092	SFR - Send frequency response	P.501 real speech	-4.7 dBPa	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	7.4.5
						3GPP2 C.S0056-A	1	Note ²
NB-093	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	7.7.2
						3GPP2 C.S0056-A	1	Note ²
NB-094*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	Real speech	+1.3 dBPa	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	7.12.2

Note 1: See section 2.4.4 (Device positioning Wrist-worn Wearables mode for HFRP acceptable value)

Note 2: For 3GPP2 Test Cases; Wearable Hands-free mode is not in the scope of reference and while testing [4] should be carried out in a similar fashion and methodology as per reference [1], radio system setup shall be in compliance with reference [4].

* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].

2.1.2 LTE Narrowband Radio Networks and Codecs (Normative)

For a device that supports AMR narrowband functionality, testing shall be performed over LTE. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS narrowband functionality, testing shall be performed over LTE. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.1.3 CDMA Narrowband Radio Networks and Codecs (Informative)

For a device that supports EVRC narrowband functionality, testing shall be performed over CDMA. The specific CDMA radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.1.4 UMTS Narrowband Radio Networks and Codecs (Informative)

For a device that supports AMR narrowband functionality, testing shall be performed over UMTS. The specific UMTS radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.1.5 GSM Narrowband Radio Networks and Codecs (Informative)

For a device that supports AMR narrowband functionality, testing shall be performed over GSM. The specific GSM radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.1.6 WLAN Narrowband Radio Networks and Codecs (Informative)

For a device that supports AMR narrowband functionality, testing shall be performed over WLAN. The specific WLAN frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS narrowband functionality, testing shall be performed over WLAN. The specific WLAN frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.1.7 5G FR1 SA Narrowband Radio Networks and Codecs (Informative)

For a device that supports AMR narrowband functionality, testing shall be performed over 5G FR1 SA. The specific VoNR radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS narrowband functionality, testing shall be performed over 5G FR1 SA. The specific VoNR radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.1.8 5G FR1 NSA Narrowband Radio Networks and Codecs (Informative)

For a device that supports AMR narrowband functionality, testing shall be performed over 5G FR1 NSA. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS narrowband functionality, testing shall be performed over 5G FR1 NSA. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

Test SIMs/PRLs in non-RF shielded environments may be required on any type of device and shall be documented.

2.2 Wideband Test Cases

2.2.1 Test Cases for 3GPP and 3GPP2 Methods

Harmonization of 3GPP and 3GPP2 standards permits a common set of test methods, as listed in the tables below.

2.2.1.1 Handset Mode (Normative)

Table 2.2-1 Wideband Handset Mode Test Cases and Applicable Settings

Handset Wideband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sect.
WB-001	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16dBm0	nominal	8	3GPP TS 26.132	16.2.0	8.2.2.2
						3GPP2 C.S0056- A	1.0	2.1.2.2
WB-02 WB-018	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16dBm0	maximum	8 13	3GPP TS 26.132	16.2.0	8.2.2.2
WB-019	RLR (dB) - Receive Loudness Rating in the presence of background noise	P.501 real speech	-16dBm0	maximum	8	3GPP TS 26.132	16.2.0	8.2.2.3
		ETSI TS 103 224 or ES 202 396-1 Pub Noise						
WB-003	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7dBPa	nominal	8	3GPP TS 26.132	16.2.0	8.2.2.1
						3GPP2 C.S0056- A	1.0	2.2.2.2
WB-004	Idle Channel Noise SND	n/a ¹	n/a	nominal	8	3GPP TS 26.132	16.2.0	8.3.1
						3GPP2 C.S0056- A	1.0	2.2.4.2
WB-005	Idle Channel Noise RCV	n/a ¹	n/a	maximum	8	3GPP TS 26.132	16.2.0	8.3.2
						3GPP2 C.S0056- A	1.0	2.1.3.2
WB-006	RFR - Receive frequency response	P.501 real speech	-16dBm0	nominal	8	3GPP TS 26.132	16.2.0	8.4.2
						3GPP2 C.S0056- A	1.0	2.1.1.2
WB-007	SFR - Send frequency response	P.501 real speech	-4.7dBPa	nominal	8	3GPP TS 26.132	16.2.0	8.4.1
						3GPP2 C.S0056- A	1.0	2.2.1.2
WB-008	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10dBm0	maximum	2	3GPP TS 26.132	16.2.0	8.7.3
						3GPP2 C.S0056- A	1.0	2.2.3.2
WB-020	Echo control characteristics	P.501 double-talk speech	-4.7dBPa	nominal	8	3GPP TS 26.132	16.2.0	8.11
WB-009*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	real speech	-1.7dBPa	nominal	8	3GPP TS 26.132	16.2.0	8.12

Handset Wideband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sect.
		ETSI TS 103 106				3GPP2 C.S0056- A	1.0	2.7.2
WB-010	Round-trip Delay (ms)	single word	-4.7dBPa	nominal	8	3GPP TS 26.132	16.2.0	8.10
WB-011						3GPP2 C.S0056- A	1.0	2.6.2
WB-012	Max acoustic pressure	Square Wave	-15 dBFS²	maximum	13	ETSI EG 202 518	1.4.1	6.2.2.3
WB-013	STMR (Sidetone Masking Rating)	P.501 real speech	-4.7dBPa	nominal, F=8		3GPP TS 26.132	16.2.0	8.5.1
WB-014				maximum, F=13		3GPP2 C.S0056- A	1.0	2.5.1.2
WB-015	Sidetone delay	P.501 real speech	-4.7dBPa	nominal	8	3GPP TS 26.132	16.2.0	8.5.4
						3GPP2 C.S0056- A	1.0	2.5.2.2
WB-074**	Delay and speech quality with packet jitter and loss³	P.501 real speech	-4.7dBPa	nominal	8	3GPP TS 26.132	16.2.0	8.10.4
WB-076**	Speech Quality (reference condition)	P.501 real speech	-4.7dBPa	nominal	8	3GPP TS 26.132 ITU-T P.863	16.2.0	8.10.4
WB-077***	Bandwidth for Bandwidth Extension	P.501 real speech	-4.7dBPa	nominal	8	ITU-T P.863.1 Suppl. 27	2017	7.2

Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.

Note 2: Increase the input signal level in 3 dB steps until it reaches 0 dBFS. Then, adjust the input signal level in 1 dB steps up and down around the input signal level that yields the highest output until the absolute maximum acoustic output is found. Refer to Section 6.2.2.2.2 of reference [10] for details.

Note 3: Test case for Voice over LTE only.

* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].

** This test cases should be covered with delay profiles as specified in 3GPP TS 26.132 [1].

** All tests requiring recommendation P.863, should use a full band mode source signal as described in [14] and [15].

***This test case is informative. It is acceptable to provide the bandwidth which was used for testing.

2.2.1.2 Handheld Handsfree/Speakerphone Mode (Normative)

Table 2.2-2 Wideband Handheld Handsfree / Speakerphone Mode Test Cases and Applicable Settings

Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Distance	Document	Rev.	Sect.
WB-040	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm ₀	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	8.2.4.2
						3GPP2 C.S0056- A	1.0	Note ²
WB-041	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dB Pa	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	8.2.4.1
						3GPP2 C.S0056- A	1.0	Note ²
WB-042	RFR - Receive frequency response	P.501 real speech	-16 dBm ₀	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	8.4.6
						3GPP2 C.S0056- A	1.0	Note ²
WB-043	SFR - Send frequency response	P.501 real speech	-4.7 dB Pa	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	8.4.5
						3GPP2 C.S0056- A	1.0	Note ²
WB-044	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm ₀	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	8.7.2
						3GPP2 C.S0056- A	1.0	Note ²

WB-075*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	real speech from TS 103 106	+1.3 dBP _a	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	8.12.2
<p>Note 1: See section 2.4.2 (Device positioning Handheld Hands-free/Speakerphone mode for HFRP acceptable value).</p> <p>Note 2: For 3GPP2 Test Cases; Handheld Hands-free mode is not in the scope of reference [4] and while testing should be carried out in a similar fashion and methodology as per reference [1] radio system setup shall be in compliance with reference [4].</p> <p>* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].</p>								

2.2.1.3 Headset Mode (Informative)

Table 2.2-3 Wideband Headset Mode Test Cases and Applicable Settings

Headset Wideband Test Cases		Measurement Setup			Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Document	Rev.	Sect.
WB-060	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	nominal	3GPP TS 26.132	16.2.0	8.2.2.2
WB-061				maximum	3GPP2 C.S0056-A	1.0	Note ²
WB-062	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	8.2.2.1
					3GPP2 C.S0056-A	1.0	Note ²
WB-063	Idle Channel Noise SND	n/a ¹	n/a	nominal	3GPP TS 26.132	16.2.0	8.3.1
					3GPP2 C.S0056-A	1.0	Note ²
WB-064	Idle Channel Noise RCV	n/a ¹	n/a	maximum	3GPP TS 26.132	16.2.0	8.3.2
					3GPP2 C.S0056-A	1.0	Note ²
WB-065	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	3GPP TS 26.132	16.2.0	8.4.2
					3GPP2 C.S0056-A	1.0	Note ²
WB-066	SFR - Send frequency response	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	8.4.1
					3GPP2 C.S0056-A	1.0	Note ²
WB-067	TCLw (weighted terminal coupling loss)	P.501compressed speech	-10 dBm0	maximum	3GPP TS 26.132	16.2.0	8.7.3
					3GPP2 C.S0056-A	1.0	Note ²
WB-068	Round-trip Delay (ms)	single word	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	8.10
					3GPP2 C.S0056-A	1.0	Note ²
WB-069	STMR (Sidetone Masking Rating)	P.501 real speech	-4.7 dBPa	Nominal	3GPP TS 26.132	16.2.0	8.5.1.2
WB-070				maximum	3GPP2 C.S0056-A	1.0	Note ²
WB-071	Sidetone delay	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	8.5.4
					3GPP2 C.S0056-A	1.0	Note ²
Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.							
Note 2: For 3GPP2 Test Cases; Handheld Hands-free mode is not in the scope of reference [4] and while testing should be carried out in a similar fashion and methodology as per reference [1] radio system setup shall be in compliance with reference [4].							

2.2.1.4 Headset Interface Mode (Informative)

Table 2.2-4 Wideband Headset Interface Mode Test Cases and Applicable Settings

Headset Interface Wideband Test Cases		Measurement Setup			Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Document	Rev.	Sect.
WB-080 WB-081	Level in Receive for Nominal speech input level	P.501 real speech	-16 dBm0	nominal maximum	ITU-T P.381	4	7.1.4
WB-082	Level in Send for Nominal speech input Level	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.3
WB-083	Noise in Send	n/a ¹	n/a	nominal	ITU-T P.381	4	7.1.11
WB-084	Noise in Receive	n/a ¹	n/a	nominal	ITU-T P.381	4	7.1.12
WB-085	Receiving frequency response	P.501 real speech	-16 dBm0	nominal	ITU-T P.381	4	7.1.8
WB-086	Sending frequency response	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.7
WB-087	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	ITU-T P.381	4	7.1.18
WB-088	Delay (Send + Receive) (ms)	single word	-60 dBV	nominal	ITU-T P.381	4	7.1.2
WB-089 WB-090	Sidetone Loss STMR	P.501 real speech	-60 dBV	nominal maximum	ITU-T P.381	4	7.1.9
WB-091	Sidetone delay	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.10

Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.

2.2.1.5 Additional Test Cases, Handset and Headset, for 3GPP Methods (Normative for Handset and Informative for Headset)

Two additional test cases for each of Handset and Headset are added for 3GPP methods only.

Table 2.2-5 Wideband Additional Test Cases For 3GPP Methods in Handset And Headset Modes

Handset/Headset Wideband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sect.
WB-016	Handset Distortion, SND	Sinusoidal	5, 0, -4.7, -10, -15, -20 dBP _a	nominal	8	3GPP TS 26.132	16.2.0	8.8.1
WB-017	Handset Distortion, RCV	Sinusoidal + activation	0, -3, -10, -16, -20, -30, -40, -45 dBm ₀	nominal	8	3GPP TS 26.132	16.2.0	8.8.2
WB-072	Headset Distortion, SND	Sinusoidal	5, 0, -4.7, -10, -15, -20 dBP _a	nominal	n/a	3GPP TS 26.132	16.2.0	8.8.1
WB-073	Headset Distortion, RCV	Sinusoidal+ activation	0, -3, -10, -16, -20, -30, -40, -45 dBm ₀	nominal	n/a	3GPP TS 26.132	16.2.0	8.8.2

2.2.1.6 Wrist-Worn Wearables Mode (Informative)

Table 2.2-6 Wideband Wrist-Worn Wearables Mode Test Cases and Applicable Settings

Wearables Wideband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Distance	Document	Rev.	Sect.
WB-078	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm ₀	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	8.2.4.2
						3GPP2 C.S0056-A	1.0	Note ²
WB-079	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBP _a	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	8.2.4.1
						3GPP2 C.S0056-A	1.0	Note ²
WB-092	RFR - Receive frequency response	P.501 real speech	-16 dBm ₀	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	8.4.6
						3GPP2 C.S0056-A	1.0	Note ²
WB-093	SFR - Send frequency response	P.501 real speech	-4.7 dBP _a	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	8.4.5
						3GPP2 C.S0056-A	1.0	Note ²
WB-094	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm ₀	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	8.7.2
						3GPP2 C.S0056-A	1.0	Note ²
WB-095*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	Real speech	+1.3 dBP _a	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	8.12.2
<p>Note 1: See section 2.4.4 (Device positioning Wrist-worn Wearables mode for HFRP acceptable value)</p> <p>Note 2: For 3GPP2 Test Cases; Wearable Hands-free mode is not in the scope of reference [4], and while testing should be carried out in a similar fashion and methodology as per reference [1], radio system setup shall be in compliance with reference [4].</p> <p>* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].</p>								

2.2.2 LTE Wideband Radio Networks and Codecs (Normative)

For a device that supports AMR wideband functionality, testing shall be performed over LTE. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS wideband functionality, testing shall be performed over LTE. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.2.3 CDMA Wideband Radio Networks and Codecs (Informative)

For a device that supports EVRC wideband, testing shall be performed over CDMA. The specific CDMA radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.2.4 UMTS Wideband Radio Networks and Codecs (Informative)

For a device that supports AMR wideband functionality, testing shall be performed over UMTS. The specific UMTS radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.2.5 WLAN Wideband Radio Networks and Codecs (Informative)

For a device that supports AMR wideband functionality, testing shall be performed over WLAN. The specific WLAN frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS wideband functionality, testing shall be performed over WLAN. The specific WLAN frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.2.6 5G FR1 SA Wideband Radio Networks and Codecs (Informative)

For a device that supports AMR wideband functionality, testing shall be performed over 5G FR1 SA. The specific VoNR radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS wideband functionality, testing shall be performed over 5G FR1 SA. The specific VoNR radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.2.7 5G FR1 NSA Wideband Radio Networks and Codecs (Informative)

For a device that supports AMR wideband functionality, testing shall be performed over 5G FR1 NSA. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

For a device that supports EVS wideband functionality, testing shall be performed over 5G FR1 NSA. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

Test SIMs/PRLs in non-RF shielded environments may be required on any type of device and shall be documented.

2.3 Super-wideband Test Cases

2.3.1 Test Cases for 3GPP Methods

Test cases for super-wideband are available from 3GPP, as noted in the tables below.

2.3.1.1 Handset Mode (Normative)

Table 2.3-1 Super-Wideband Handset Mode Test Cases and Applicable Settings

Handset Super-Wideband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sect.
SWB-001	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	nominal	8	3GPP TS 26.132	16.2.0	9.2.2.2
SWB-002 SWB-035	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	maximum	8 13	3GPP TS 26.132	16.2.0	9.2.2.2
SWB-036	RLR (dB) - Receive Loudness Rating in the presence of background noise	P.501 real speech ETSI TS 103 224 or ES 202 396-1 Pub Noise	-16 dBm0	maximum	8	3GPP TS 26.132	16.2.0	9.2.2.3
SWB-003	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.2.2.1
SWB-004	Idle Channel Noise SND	n/a ¹	n/a	nominal	8	3GPP TS 26.132	16.2.0	9.3.1
SWB-005	Idle Channel Noise RCV	n/a ¹	n/a	maximum	8	3GPP TS 26.132	16.2.0	9.3.2
SWB-006	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	8	3GPP TS 26.132	16.2.0	9.4.2
SWB-007	SFR - Send frequency response	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.4.1
SWB-008	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	2	3GPP TS 26.132	16.2.0	9.7.3
SWB-011	Echo control characteristics	P.501 double-talk speech	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.11
SWB-009*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	real speech	-1.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.12
SWB-010	Round-trip Delay (ms)	single word	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.10
SWB-012	Max acoustic pressure	Square Wave	-15 dBFS ²	maximum	13	ETSI EG 202 518	1.4.1	6.2.2.3
SWB-013 SWB-014	STMR (Sidetone Masking Rating)	P.501 real speech	-4.7 dBPa	nominal, F=8 maximum, F=13		3GPP TS 26.132	16.2.0	9.5.1
SWB-015	Sidetone delay	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.5.4
SWB-016**	Delay and speech quality with packet jitter and loss ³	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.10.4
SWB-036	Handset Distortion, SND	Sinusoidal	5, 0, -4.7, -10, -15, -20 dBPa	nominal	8	3GPP TS 26.132	16.2.0	9.8.1
SWB-037	Handset Distortion, RCV	Sinusoidal + activation	0, -3, -10, -16, -20, -30, -40, -45 dBm0	nominal	8	3GPP TS 26.132	16.2.0	9.8.2
SWB-076**	Speech Quality (reference condition)	P.501 real speech	-4.7 dBPa	nominal	8	3GPP TS 26.132 ITU-T P.863	16.2.0	9.10.4

Handset Super-Wideband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Appl. Force [N]	Document	Rev.	Sect.
<p>Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.</p> <p>Note 2: Increase the input signal level in 3 dB steps until it reaches 0 dBFS. Then, adjust the input signal level in 1 dB steps up and down around the input signal level that yields the highest output until the absolute maximum acoustic output is found. Refer to Section 6.2.2.2.2 of reference [10] for details.</p> <p>Note 3: Test case for Voice over LTE only.</p> <p>* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].</p> <p>** This test cases should be covered with delay profiles as specified in in 3GPP TS 26.132 [1].</p> <p>** All tests requiring recommendation P.863, should use a full band mode source signal as described in [14] and [15].</p>								

2.3.1.2 Handheld Hands-free/Speakerphone Mode (Normative)

Table 2.3-2 Super-Wideband Handheld Hands-free/Speakerphone Mode Test Cases and Applicable Settings

HH Hands-free Super-Wideband Test Cases		Measurement Setup				Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Distance	Document	Rev.	Sect.
SWB-017	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	9.2.4.2
SWB-018	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dB Pa	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	9.2.4.1
SWB-019	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	9.4.6
SWB-020	SFR - Send frequency response	P.501 real speech	-4.7 dB Pa	nominal	HFRP ¹	3GPP TS 26.132	16.2.0	9.4.5
SWB-021	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	9.7.2
SWB-022*	Quality in presence of ambient noise: SMOS, NMOS, GMOS	real speech from TS 103106	+1.3 dBPa	maximum	HFRP ¹	3GPP TS 26.132	16.2.0	9.12.2
<p>Note 1: See section 2.4.2 (Device positioning Handheld Hands-free / Speakerphone mode for HFRP acceptable value).</p> <p>* This test case should be covered with background noise conditions as specified in 3GPP TS 26.132 [1].</p>								

2.3.1.3 Headset Mode (Informative)

Table 2.3-3 Super-Wideband Headset Mode Test Cases and Applicable Settings

Headset Super-Wideband Test Cases		Measurement Setup			Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Document	Rev.	Sect.
SWB-023 SWB-024	RLR (dB) - Receive Loudness Rating	P.501 real speech	-16 dBm0	nominal maximum	3GPP TS 26.132	16.2.0	9.2.2.2
SWB-025	SLR (dB) - Sending Loudness Rating	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	9.2.2.1
SWB-026	Idle Channel Noise SND	n/a ¹	n/a	nominal	3GPP TS 26.132	16.2.0	9.3.1
SWB-027	Idle Channel Noise RCV	n/a ¹	n/a	maximum	3GPP TS 26.132	16.2.0	9.3.2
SWB-028	RFR - Receive frequency response	P.501 real speech	-16 dBm0	nominal	3GPP TS 26.132	16.2.0	9.4.2
SWB-029	SFR - Send frequency response	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	9.4.1
SWB-030	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	3GPP TS 26.132	16.2.0	9.7.3
SWB-031	Round-trip Delay (ms)	single word	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	9.10
SWB-032 SWB-033	STMR (Sidetone Masking Rating)	P.501 real speech	-4.7 dBPa	nominal maximum	3GPP TS 26.132	16.2.0	9.5.1.2
SWB-034	Sidetone delay	P.501 real speech	-4.7 dBPa	nominal	3GPP TS 26.132	16.2.0	9.5.4
SWB-072	Headset Distortion, SND	Sinusoidal	5, 0, -4.7, -10, -15, -20 dBPa	nominal	3GPP TS 26.132	16.2.0	9.8.1
SWB-073	Headset Distortion, RCV	Sinusoidal+ activation	0, -3, -10, -16, -20, -30, -40, -45 dBm0	nominal	3GPP TS 26.132	16.2.0	9.8.2
Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.							

2.3.1.4 Headset Interface Mode (Informative)

Table 2.3-4 Super-Wideband Headset Interface Mode Test Cases and Applicable Settings

Headset Interface Super-Wideband Test Cases		Measurement Setup			Standards Reference for each Test ID		
Test ID	Parameter (Metric)	Test Signal	Level	DUT Volume Control	Document	Rev.	Sect.
SWB-080 SWB-081	Level in Receive for Nominal speech input level	P.501 real speech	-16 dBm0	nominal maximum	ITU-T P.381	4	7.1.4
SWB-082	Level in Send for Nominal speech input Level	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.3
SWB-083	Noise in Send	n/a ¹	n/a	nominal	ITU-T P.381	4	7.1.11
SWB-084	Noise in Receive	n/a ¹	n/a	nominal	ITU-T P.381	4	7.1.12
SWB-085	Receiving frequency response	P.501 real speech	-16 dBm0	nominal	ITU-T P.381	4	7.1.8
SWB-086	Sending frequency response	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.7
SWB-087	TCLw (weighted terminal coupling loss)	P.501 compressed speech	-10 dBm0	maximum	ITU-T P.381	4	7.1.18
SWB-088	Delay (Send + Receive) (ms)	single word	-60 dBV	nominal	ITU-T P.381	4	7.1.2
SWB-089 SWB-090	Sidetone Loss STMR	P.501 real speech	-60 dBV	nominal maximum	ITU-T P.381	4	7.1.9
SWB-091	Sidetone delay	P.501 real speech	-60 dBV	nominal	ITU-T P.381	4	7.1.10

Note 1: A test signal, such as CSS bursts, may have to be intermittently applied to prevent 'silent mode' operation of the MS. Such a test signal should be documented by the tester, if used.

2.3.2 LTE Super Wideband Radio Networks and Codecs (Normative)

For a device that supports EVS super wideband functionality, testing shall be performed over LTE. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.3.3 WLAN Super Wideband Radio Networks and Codecs (Informative)

For a device that supports EVS super wideband functionality, testing shall be performed over WLAN. The specific WLAN frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.3.4 5G FR1 SA Super Wideband Radio Networks and Codecs (Informative)

For a device that supports EVS super wideband functionality, testing shall be performed over 5G FR1 SA. The specific VoNR radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

2.3.5 5G FR1 NSA Super Wideband Radio Networks and Codecs (Informative)

For a device that supports EVS super wideband functionality, testing shall be performed over 5G FR1 NSA. The specific VoLTE radio carrier frequency and channel number tested shall be documented. Please refer to [Appendix B](#) for applicable Codecs, Bit rates, Bands and Frequency details.

Test SIMs/PRLs in non-RF shielded environments may be required on any type of device and shall be documented.

2.4 Device Positioning

2.4.1 Handset Mode (Normative)

When testing a handset telephone, the device is mounted on the HATS in position and orientation as described in ITU-T P.64 [7] as per Annex E and the Manufacturers Ear Cap Reference Position. If no Ear Cap Position is declared by the Manufacturer, the Standard Position per Annex E shall be used. As defined in P.64 Annex E, the Standard Position angles A, B, and C are reproduced in Table 2.4-1. Note that the tolerance of these values is to within $\pm 0.1^\circ$, as given by the precision of the values.

Table 2.4-1 Handset Standard Position Angles

Angle	Value [Degrees]
A	21.2
B	-12.9
C	2.3

For handsets where MECRP is provided, the values for Table P.64/E.1, reproduced below as Table 2.4-2, must be reported. See the user guide from the specific HATS' manufacturer for relative angle positioning.

Table 2.4-2 Table for Reporting MECRP Positioning Values

MECRP (Delta From Actual ECRP)	
Axis	Delta [mm]
ye	
ze	
Angle Settings	
Angle	Delta from standard angle [°]
A	
B	
C	

The artificial mouth shall conform to ITU-T P.58 [6]. The artificial ear shall conform to ITU-T P.57 [5]. Type 3.3 artificial ear shall be used. The applied force shall be as indicated in Table 2.1-1 and Table 2.2-1.

Note: Measurements of noise suppression performance in alternate positions may be desirable. The test report shall include details of handset position and orientation in accordance with Annex E of ITU-T P.64 [7].

For tests requiring a Nominal volume setting and a user controllable receive volume control is provided on the Device under test, the setting shall be chosen such that the nominal RLR of 2 dB is met as closely as possible. For tests where a Maximum volume setting is required, the user controllable volume control shall be set to the maximum setting.

OEMs strive to meet the receiving frequency response mask at Nominal Receive volume, so in case the Receiving Frequency response is failing, MECRP values should be reconfirmed or the Device under Test slightly re-adjusted as the HATS artificial pinna is pliable and the Device may seal up the ear concha cavity, resulting in a bass heavy response. Alternatively, the Device may not seal well to the pinna and have a weak bass response, a remount or ever so slight adjustment may correct this. Reconfirm the Nominal RLR after any such adjustment and document settings.

2.4.2 Handheld Handsfree/Speakerphone Mode (Normative)

When testing a handheld handsfree telephone, the device is mounted in the HATS HFRP in position and orientation as described in *3GPP TS 26.132* [1] as per Section 5.1.3.3. The distance d_{HF} and the angle Θ_{HF} between the HATS Reference point and the device display is defined by the Manufacturer; if no such position is declared a Standard Position of 42cm and angle of 0° will be used. Testing with HATS shall be in compliance with *ITU-T P.581* [9]. The artificial mouth shall conform to *ITU-T P.58* [6]. The artificial ear shall conform to *ITU-T P.57* [5]. Type 3.3 artificial ear may be used.

2.4.3 Headset Mode (Informative)

When testing a telephone including a headset, the headset is mounted in its recommended wearing position as described in *3GPP TS 26.132* [1] per Section 5.1.2 and per *ITU-T P.380* [8] Clause 6. The OEM Device manufacturer should provide at least one Headset to be used for this test. For first time tests of headsets; 5 repeat measurements with refit of the headset in the pinna is recommended and the average of at least 3 consistent measurements be reported. The artificial mouth shall conform to *ITU-T P.58* [6]. The artificial ear shall conform to *ITU-T P.57* [5]. Type 3.3 artificial ear shall be used.

2.4.4 Wrist-worn Wearables Mode (Informative)

When testing a wrist-worn wearables device, the device is mounted in front of the HATS, similar to the HATS HFRP, as shown in Figure 2.4-1. The distance from device to HATS lip-ring d_{LF} and the angle θ_{LF} between the HATS lip-ring and the device is defined by the Manufacturer. If d_{LF} and θ_{LF} are not defined by the manufacturer, then the distance d_{LF} and the angle θ_{LF} between the HATS lip-ring and the device visual user interface should be 30cm and angle 0°. The artificial arm should be mounted parallel to the lip plane of the HATS, as shown in Figure 2.4-1 with the device visual user interface positioned normal to the HATS lip plane.

The device under test should be mounted on an artificial arm, with dimensions consistent with [REF: relevant clause of OTA Test Plan] If the artificial arm is constructed of rigid material, it should be covered with a compliant material. A cloth of thickness 2 ± 1 mm, or compliant material (Shore-A 25 ± 10) of the same thickness should be used to cover the surface of the arm in vicinity of the device under test. The compliant material should be placed between the device and the arm and sized so that the material extends at least 1 cm along the arm beyond each side of the device. The device should be mounted on the arm, on top of the compliant material, so that it can be repositioned intentionally, but not so tightly that the surface of the arm is deformed or that the device under test cannot be rotated or repositioned. Wrist-worn devices are often equipped with straps that provide for a discrete range of diameters. One approach is to select the tightest option and then open by one step to somewhat lessen the tightness of mounting.

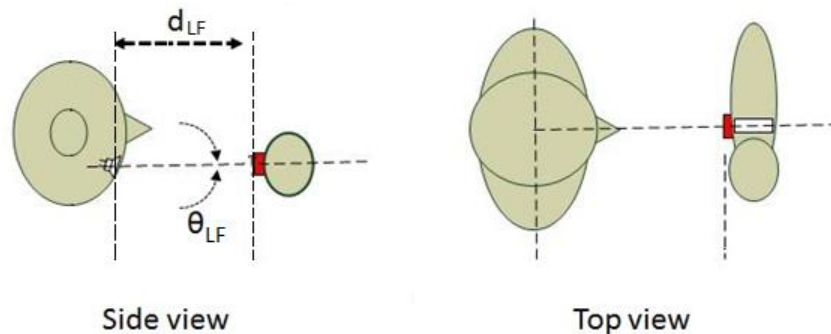


Figure 2.4-1 Figure Device Under Test (in Red) Mounted on Arm Positioned in Front of HATS

The artificial mouth shall conform to *ITU-T P.58* [6]. The artificial ear shall conform to *ITU-T P.57* [5]. Type 3.3 artificial ear may be used.

The HATS HFRP must be adjusted for the distance d_{LF} . If the distance d_{LF} of 30cm is used, the HFRP correction should be 16.0 dB.

2.5 Test Methods for Quality in the Presence of Ambient Noise

2.5.1 Speech Material

Appropriate speech material is referenced in Annex C of *ETSI TS 103 106* [2]. Only the last 16 sentences are used for individual predictions, then the 16 numbers are averaged into per-condition scores. The first 4 sentences are used to secure a steady voice channel.

2.5.2 Background Noise Simulation and Spectral Validation

Background noise simulation is to be in accordance with *ETSI ES 202 396-1* [3] or *ETSI TS 103 224* [12] for handsets, note the test room requirements in section 6.1. If an office type room is used, reverberation time should be in the interval $0.2\text{ s} < RT60 < 0.7\text{ s}$ between 100 Hz and 8 kHz, and noise floor should be below 30 dB SPL(A). Background noise types to be used are listed in Tables 2d and 2h of *3GPP TS 26.132* [1]. For hand-held speakerphones, the preferred background noise simulation is found in *ETSI TS 103 224* [12]. Noise types are found in Tables 2d2 and 2h2.

In particular, reliable results require accurate simulation of background noise levels and power spectra. It is required to perform spectral validation for each noise type to be used. Spectral validation consists of recording the simulated background noise and recording at the two HATS artificial ears. After appropriate application of Independent of Direction equalization to the DRP recordings, the measured power spectra are compared to the power spectra of the source noise signals, in 1/3rd octave bands. The measured power spectra shall be within $\pm 3\text{ dB}$ of the reference source power spectra.

When using background noise simulation in accordance with *ETSI ES 202 396-1*, a final check on the background noise simulation shall be conducted using the method described in [Appendix A](#).

2.5.3 Measurement Procedure

Measurements shall follow the requirements in *TS 103 106* [2] and *TS 103 281* [17], Section 9, with the background noise setup in accordance to *ETSI ES 202 396-1* [3] and *ETSI TS 103 224* [12].

Appendix A Verification Method for ETSI ES 202 396-1 Background Noise Simulation

A.1 Objective

This method is based on 3GPP contribution *S4-130400*, Reference scores for 3Quest [\[A1\]](#). The goal is to provide an additional validation of the background noise simulation.

A.2 Method

After the background noise simulation has been set up and verified to be in compliance with requirements in ETSI *ES 202 396-1* [\[3\]](#) and the HATS properly equalized with speech levels set, recordings are taken using the method of ETSI *TS 103 106* [\[2\]](#), but with measurement microphones used to provide the required 'processed' and 'unprocessed' signals. A measurement microphone placed at HATS MRP is used to provide the 'processed' signal (i.e., good SNR), while the HATS ear with ID equalization is used to provide the noisy 'unprocessed' signal (i.e., poor SNR).

The speech and noise levels are as referenced for Test Case NB-009 of [Table A.2-1](#). One additional measurement is taken using speech but no additional background noise.

Reference scores using ETSI *TS 103 106* [\[2\]](#) are computed in both wideband and narrowband modes, with the proxy 'processed' signal (recorded at MRP) filtered appropriately as in [Table A.2-1](#). Both Highpass and Lowpass filters are applied to simulate the effect of the telephone channel of corresponding bandwidth. No filter (other than ID equalization) is applied to the proxy 'unprocessed' signal (recorded at DRP).

Table A.2-1 Filters for Reference Scores

Test Case	Highpass Filter	Lowpass Filter
Wideband	4 th order, at 100 Hz	4 th order, at 8000 Hz

Ideally, reference scores should be within ± 0.2 MOS of the values in [Table A.2-2](#). Reference Scores which exceed the values listed in [Table A.2-2](#) by more than ± 0.2 MOS, will be considered by operators. Filenames are taken from ETSI *ES 202 396-1* [\[3\]](#).

Table A.2-2 Reference Scores for Wideband [From [\[A2\]](#)]

Condition	Filename	SMOS	NMOS
Recording in pub	Pub_Noise_binaural_V2	4.2	2.4
Recording at pavement	Outside_Traffic_Road_binaural	3.9	2.6
Recording at pavement	Outside_Traffic_Crossroads_binaural	4.3	2.9
Recording at departure platform	Train_Station_binaural	4.3	3
Recording at the drivers' position	Fullsize_Car1_130Kmh_binaural	4.4	2.8
Recording at sales counter	Cafeteria_Noise_binaural	4.4	2.8
Recording in a cafeteria	Mensa_binaural	4.5	3.1
Recording in business office	Work_Noise_Office_Callcenter_binaural	4.6	3.4
Quiet*	<none>	4.6	4.3
*Quiet condition is executed for verification purposes only. It is N/A for device testing.			

A.3 References

- [A1] S4-130400, Reference scores for 3Quest, Qualcomm, 3GPP SA4#73, 15-19 March 2013, Qingdao, China
http://www.3gpp.org/ftp/tsg_sa/WG4_CODEC/TSGS4_73/Docs/S4-130400.zip.
- [A2] S4-131124, Summary of reference scores for ETSI TS 103 106, Qualcomm, 3GPP SA4#75, 23-27 September 2013, Vancouver, CA.
http://www.3gpp.org/ftp/tsg_sa/WG4_CODEC/TSGS4_75/Docs/S4-131124.zip

Appendix B Radio Network and Codec Information

See the Excel spreadsheet *Appendix B_Radio Network and Codec Information.xls*. in the Zip file.

Appendix C Revision History

Date	Version	Description
November 2014	1.0	Initial release
May 2016	1.1	<ul style="list-style-type: none"> Added LTE to list of transmission technologies Updated references to 3GPP Release 13 Corrected citation for max acoustic pressure test NB- 012 and clarified test signal Added wideband test cases Section 2.2 Clarified language in Device Positioning section 2.3
December 2016	2.0	<ul style="list-style-type: none"> Changed title to Speech Performance Recommendations Added super-wideband test cases, section 2.3 Added handset speech delay and quality with jitter and packet loss, test cases NB-074 and WB-074 Added background noise for hand-held speakerphone, NB-075 and WB-075
January 2018	2.1	<ul style="list-style-type: none"> Added Speech Quality P.863 for Handset, test cases NB-076, WB-076 and SWB-076 Added Background Noise for Super-wideband speech, test cases SWB-009 and SWB-022 Added Distortion for Super-wideband speech, test cases SWB-036, SWB-037, SWB-072, SWB-073 Added Handset Bandwidth extension, test case WB- 077 Added Headset Interface testing as sections 2.1.1.4, 2.2.1.4 and 2.3.1.4, test cases NB-080 – NB-091, WB- 080 – WB-091, and SWB-080 – SWB-091 Added Wearables Mode testing as sections 2.1.1.6, 2.2.1.6 and 2.4.4, test cases NB-077 – NB-079, NB-092 – NB-094, WB-078 – WB-079, and WB-092 – WB-095. Updated references to 3GPP Release 14, and latest revision of referenced standards. Added Standard [16] in section 1.3.
April 2019	2.1.1	<ul style="list-style-type: none"> Changed title to Speech Performance Test Plan Added Radio Network and Codec Information to Appendix B Added super-wideband reference to sections 1.1 and 1.2. Categorized all the sections as normative and informative. Headset interface mode sections are categorized as informative and unmarked sections are categorized normative. Added notes referring to 3GPP TS 26.132 based background noise conditions in the applicable sections with “Delay and speech quality with packet jitter and loss” test cases. Added notes referring to 3GPP TS 26.132 based delay profiles in the applicable sections with “Speech quality” test cases. Updated NB/WB/SWB Radio Network and Codec sections with codec details. Included Appendix B with additional details on bands and codecs. Updated Wrist-worn Wearables Mode section 2.4.4 with device positioning change.
December 2019	2.2	<ul style="list-style-type: none"> Revised 3GPP2 requirements in Notes in Section 2.1.1.3, 2.1.1.6, 2.2.1.2, 2.2.1.3, 2.2.1.4, 2.2.1.6, 2.3.1.4
July 2020	2.3	<ul style="list-style-type: none"> Updated references to 3GPP Release 16.2.0
June 2021	2.4	<ul style="list-style-type: none"> Clarified the test sections with the definitions of Normative and Informative Included radio networks and codecs for <ul style="list-style-type: none"> WLA, 5G FR1 SA, 5G FR1 NSA narrowband WLA, 5G FR1 SA, 5G FR1 NSA wideband WLA, 5G FR1 SA, 5G FR1 NSA super wideband

Date	Version	Description
July 2022	2.5	<ul style="list-style-type: none"> • Updated sections 2.5.2, 2.5.3 and Appendix A • Removed Table A.2-2 Reference Scores for Narrowband • Updated table A.2-1 Filters for Reference Scores • Updated references [2] and [12] • Added reference [17]
April 2024	2.5.1	<ul style="list-style-type: none"> • Changed the underlying reference for the maximum acoustic pressure test cases NB-012, WB-012 and SWB-012. • Fixed erroneous reference marks in Tables 2.1-1 and 2.2-1. • Updated/corrected notes in Tables 2.1-1, 2.1-4, 2.2-1, 2.2-4, 2.3-4 and A.2-2. • Added missing text in section 2.1.2.
October 2024	2.5.2	<ul style="list-style-type: none"> • Updated text in references [14] and [15] in Section 1.3. • Added table footnote for recommendation P.863 to reference [14] and [15] in Table 2.1-1, Table 2.2-1, and Table 2.3-1. • Minor formatting changes, combined footnotes into one cell, italicized document references in body text, etc.